



AC-240P/156-60S
 AC-245P/156-60S
 AC-250P/156-60S
 AC-255P/156-60S
 AC-260P/156-60S

www.axitecsolar.us

AXITEC[®]
 high quality german solar brand

AXIpower

60 cell/polycrystalline photovoltaic modules
 High performance photovoltaic modules



German engineered – made for America



12 years manufacturer's warranty
 Two more years than industry standard



Highest performance due to specifically selected technologies and materials



Positive power tolerance from 0-5 Wp
 Higher guaranteed yield



Snow load of up to 113 psf
 Stable module for a long life in extreme conditions



100 % electroluminescence inspection
 Micro crack and hotspot free modules



Axitec-Soft-Grip-Seam aluminum frame
 Higher stability and easier handling




High quality junction box and connector system for a longer life time



Fig. similar 60P156USA150616A

Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance
- Warrants around 6% more than the market standard

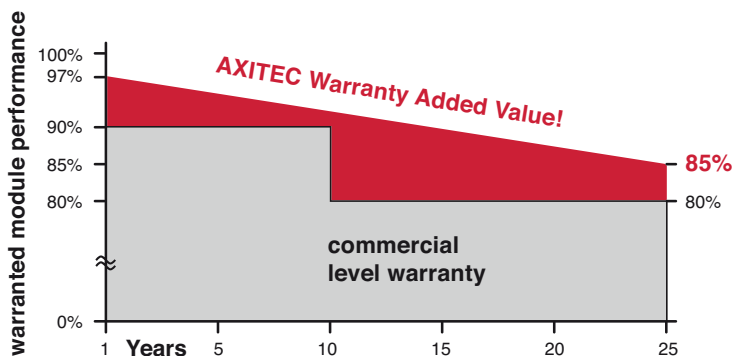

Module Fire Performance:
 TYPE 1 (UL 1703)
 CLASS C (IEC61730)

Distributed by:

Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1.5 at a cell temperature of 25° C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-240P/156-60S	240 Wp	30.25 V	7.98 A	8.50 A	37.20 V	14.75 %
AC-245P/156-60S	245 Wp	30.36 V	8.13 A	8.67 A	37.50 V	15.06 %
AC-250P/156-60S	250 Wp	30.70 V	8.18 A	8.71 A	37.80 V	15.37 %
AC-255P/156-60S	255 Wp	30.80 V	8.30 A	8.84 A	37.92 V	15.67 %
AC-260P/156-60S	260 Wp	30.92 V	8.43 A	9.01 A	38.00 V	15.98 %

Design



Frontside	0.13 inch (3.2 mm) hardened, low-reflection white glass
Cells	60 polycrystalline high efficiency cells 6 inch (156 x 156 mm)
Backside	Composite film
Frame	1.57 inch (40 mm) silver anodized aluminium frame

Mechanical data

L x W x H	64.57 x 39.06 x 1.57 inch (1640 x 992 x 40 mm)
Weight	40.78 lbs (18.5 kg) with frame

Power connection

Socket	Protection Class IP65 (3 bypass diodes)
Wire	43.3 inch, AWG 11
Plug-in system	Plug/socket IP67

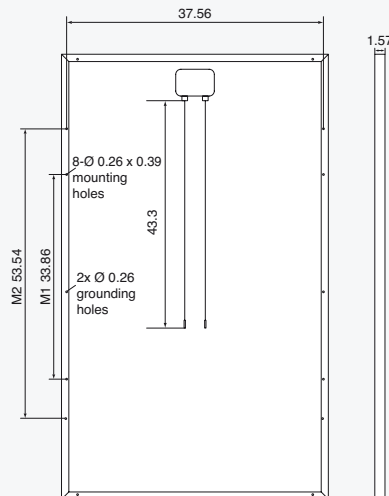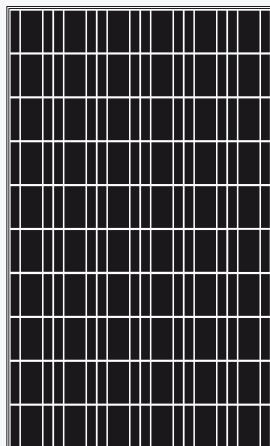

All dimensions in inch

Limit values

System voltage	1000 VDC (UL) 1000 VDC (IEC)
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	113 PSF
Reverse current feed IR	15,0 A
Permissible operating temperature	-40C to 85C / -40F to 185F

(No external voltages greater than V_o may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0,30 %/K
Current I _{sc}	0,04 %/K
Output P _{mpp}	-0,42 %/K

Low-light performance (Example for AC-260P/156-60S)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	1,70 A	30,10 V
400 W/m ²	3,42 A	30,15 V
600 W/m ²	5,41 A	30,52 V
800 W/m ²	6,82 A	30,86 V
1000 W/m ²	8,43 A	30,92 V

Packaging

Module pieces per pallet	25
Module pieces per HC-container	700